

| mm  | mm | mm | mm          | mm  | N    | N    | QTE. |             | QTE. | QTE. |   |   |
|-----|----|----|-------------|-----|------|------|------|-------------|------|------|---|---|
| 4,8 | 10 | 14 | 1,0 - 4,0   | 5,2 | 2400 | 2200 | 250  | 130 248 101 | -    | -    | - | - |
|     | 12 |    | 3,0 - 6,0   |     |      |      | 250  | 130 248 121 | -    | -    | - | - |
|     | 14 |    | 5,0 - 8,0   |     |      |      | 250  | 130 248 141 | -    | -    | - | - |
|     | 16 |    | 7,0 - 10,0  |     |      |      | 250  | 130 248 161 | -    | -    | - | - |
|     | 18 |    | 9,0 - 12,0  |     |      |      | 250  | 130 248 181 | -    | -    | - | - |
|     | 20 |    | 11,0 - 14,0 |     |      |      | 250  | 130 248 201 | -    | -    | - | - |
|     | 25 |    | 14,0 - 19,0 |     |      |      | 250  | 130 248 251 | -    | -    | - | - |
|     | 30 |    | 19,0 - 24,0 |     |      |      | 250  | 130 248 301 | -    | -    | - | - |
|     | 35 |    | 24,0 - 29,0 |     |      |      | 250  | 130 248 351 | -    | -    | - | - |

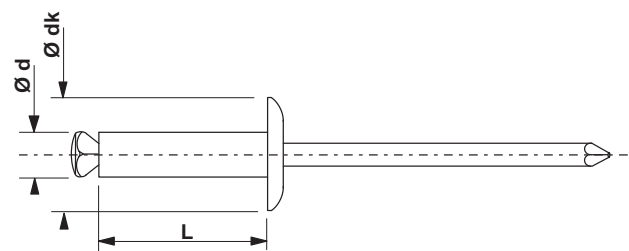
SUR DEMANDE  
UPON REQUEST

Ø 3,2 - 6,4 TL • Ø 3,2 - 4 - 4,8 - 6,4 TEL

Ø 3,2 - 6,4 Large head • Ø 3,2 - 4 - 4,8 - 6,4 Extra-large head

GOSTAR TRS  
NOIR / BLACK

TÊTE RONDE STANDARD / DOMED HEAD

ALUMINIUM  
ALUMINIUMACIER ZINGUÉ  
ZINC PLATED STEEL

| Ø   | L   | dk |             |     |      |      | BOÎTE CARTON<br>CARDBOARD BOX | BOÎTE PLASTIQUE<br>PLASTIC BOX<br>PAR LOT DE 5 / PACK OF 5 | BLISTER<br>BLISTER<br>PAR LOT DE 6 / PACK OF 6 |            |        |                 |
|-----|-----|----|-------------|-----|------|------|-------------------------------|------------------------------------------------------------|------------------------------------------------|------------|--------|-----------------|
| mm  | mm  | mm | mm          | mm  | N    | N    | QTE.                          | REF.                                                       | QTE.                                           | REF.       | QTE.   | REF.            |
| 4   | 8   | 10 | 2,0 - 5,0   | 4,4 | 1800 | 1300 | 500                           | 128 140 101                                                | -                                              | -          | -      | -               |
|     |     | 12 | 4,0 - 7,0   |     |      |      | 500                           | 128 140 121                                                | -                                              | -          | -      | -               |
|     |     | 14 | 6,0 - 9,0   |     |      |      | 500                           | 128 140 141                                                | -                                              | -          | -      | -               |
|     |     | 16 | 8,0 - 11,0  |     |      |      | 250                           | 128 140 161                                                | 250                                            | 128140161P | 50/100 | 128 140 164 A/B |
|     |     | 18 | 10,0 - 13,0 |     |      |      | 250                           | 128 140 181                                                | -                                              | -          | -      | -               |
|     |     | 20 | 12,0 - 15,0 |     |      |      | 250                           | 128 140 201                                                | -                                              | -          | -      | -               |
|     |     | 25 | 15,0 - 20,0 |     |      |      | 250                           | 128 140 251                                                | -                                              | -          | 50     | 128 140 254 A   |
|     |     | 30 | 20,0 - 25,0 |     |      |      | 250                           | 128 140 301                                                | -                                              | -          | -      | -               |
|     |     | 35 | 24,0 - 29,0 |     |      |      | 250                           | 128 140 351                                                | -                                              | -          | -      | -               |
| 4,8 | 9,5 | 10 | 1,0 - 4,0   | 5,2 | 2400 | 2200 | 250                           | 131 148 101                                                | -                                              | -          | -      | -               |
|     |     | 12 | 3,0 - 6,0   |     |      |      | 250                           | 131 148 121                                                | -                                              | -          | -      | -               |
|     |     | 14 | 5,0 - 8,0   |     |      |      | 250                           | 131 148 141                                                | -                                              | -          | -      | -               |
|     |     | 16 | 7,0 - 10,0  |     |      |      | 250                           | 131 148 161                                                | -                                              | -          | -      | -               |
|     |     | 18 | 9,0 - 12,0  |     |      |      | 250                           | 131 148 181                                                | -                                              | -          | -      | -               |
|     |     | 20 | 11,0 - 14,0 |     |      |      | 250                           | 131 148 201                                                | -                                              | -          | -      | -               |
|     |     | 25 | 14,0 - 19,0 |     |      |      | 250                           | 131 148 251                                                | -                                              | -          | -      | -               |
|     |     | 30 | 19,0 - 24,0 |     |      |      | 250                           | 131 148 301                                                | -                                              | -          | -      | -               |
|     |     | 35 | 24,0 - 29,0 |     |      |      | 250                           | 131 148 351                                                | -                                              | -          | -      | -               |

SUR DEMANDE  
UPON REQUEST

Ø 3,2 - 6,4 • Autres longueurs • TF • Tête spéciale • Tête retenue • Autres couleurs et anodisation

Ø 3,2 - 6,4 • Other lengths • Countersunk head • Special head • Retained head • Other colours and anodization